




INDUSTRIAL BATTERY - VRLA-AGM BATTERY - HIGH RATE SERIES

MODEL: SJ 55-12 (55 Ah)



Plane Chart:

Unit:(mm) Terminal type:(T1)

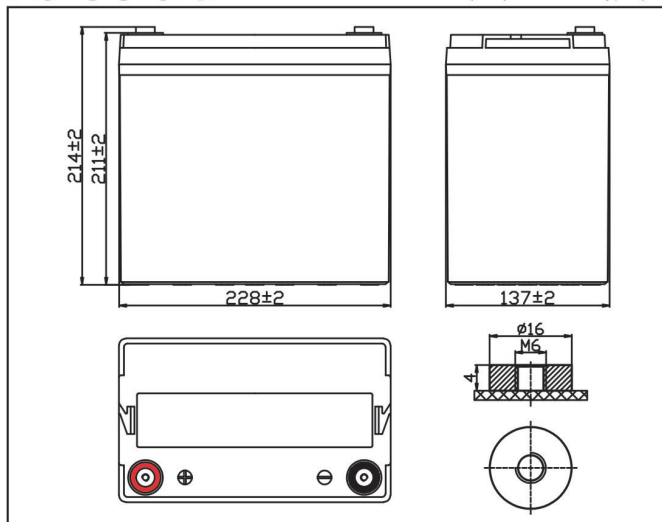


ISO 9001
ISO 14001
OHSAS18001




Parameter Chart:

Volts		12 V
Capacity(25°C)	20 hours rate (2.75A)	55Ah
Discharge Current Testing (25°C)	20 I ₂₀ rate (55A,27min)	34min
	60 I ₂₀ rate (165A,7min)	10min
Internal Resistance	Full Charged Battery 25°C	6.8mΩ
Capacity Affected By Temperature	40°C	104%
	25°C	100%
	0°C	83%
	-15°C	65%
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%
	Capacity After 6 Months Storage	82%
	Capacity After 12 Months Storage	65%
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 16.5A Voltage 14.5~14.9V
	Float (25°C)	Charge Voltage 13.6~13.8V
Weight (Approx)		16.8Kg



Residual Capacity

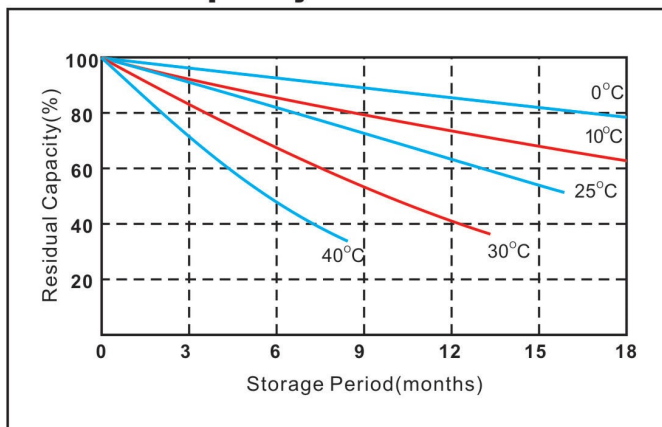

Discharge Current 25°C

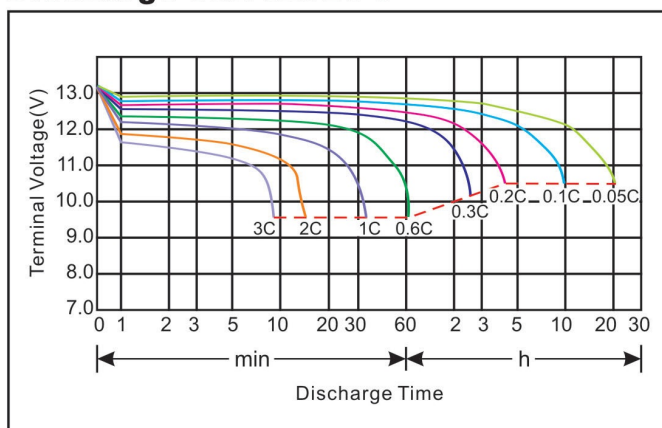

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

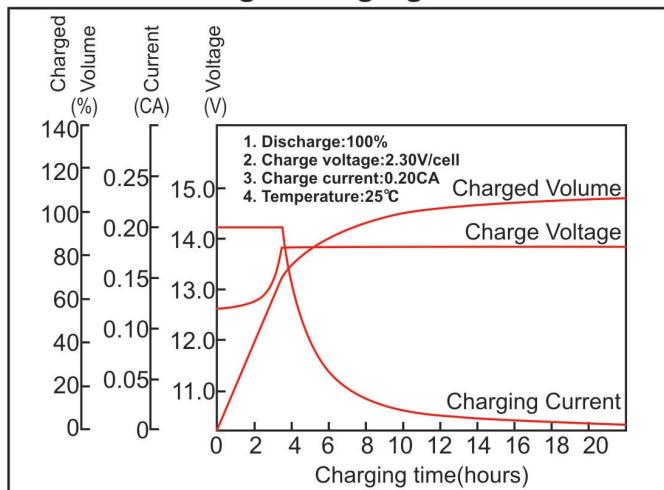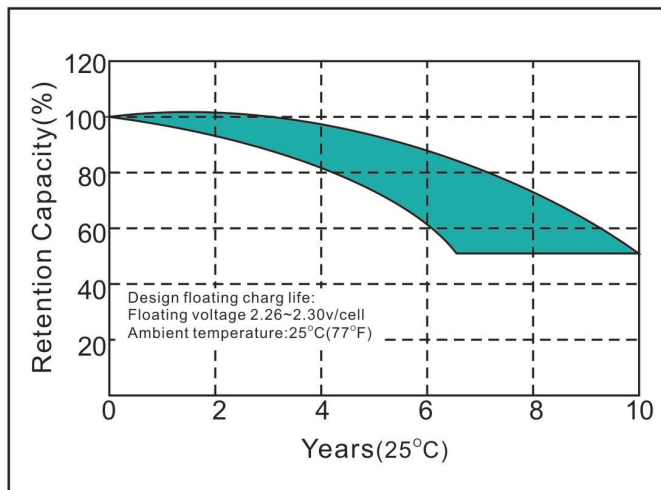MODEL: SJ 55-12 (55 Ah)
Constant voltage charging characteristics

Float Life

Constant Current Discharge Characteristics (A, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	180.4	130.3	100.2	62.1	36.1	20.1	14.7	10.0	6.7	5.6	2.9
10.2V	171.3	124.2	96.2	59.6	34.7	19.8	14.5	9.9	6.7	5.5	2.9
10.5V	169.3	122.2	94.3	58.4	33.9	19.6	14.4	9.8	6.6	5.5	2.8
10.8V	161.3	116.2	91.3	56.6	32.9	19.4	14.2	9.7	6.5	5.5	2.8

Constant Power Discharge Characteristics (Watt, 25°C)

F.V/Time	10min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	1893.8	1406.8	1100.2	697.4	410.8	232.5	173.3	118.2	79.8	66.7	34.8
10.2V	1799.6	1336.7	1056.1	669.3	394.8	229.5	171.3	117.2	79.1	66.1	34.7
10.5V	1777.5	1319.6	1035.1	655.3	703.4	226.5	169.3	116.2	78.6	66.0	34.4
10.8V	1691.4	1256.5	1003.0	635.3	374.7	224.4	167.3	115.2	77.7	65.8	34.3

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
Battery	12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.



Distributor: LISA CONTROL TECHNOLOGY LIMITED COMPANY

Address: No.10, LK10, Khu dat dich vu Ha Tri, Ha Cau ward, Ha Dong district, Hanoi capital.

Tel.: +84 24 7309 9997

Fax: +84 24 7309 9997

Email: contact@lisatech.vn

Website: www.lisatech.vn